



Low Price Reflow Checker CTP-300U/CTP-600U

CTP-300U/CTP-600U is a unit to measure a temperature profile of soldering reflow equipment.

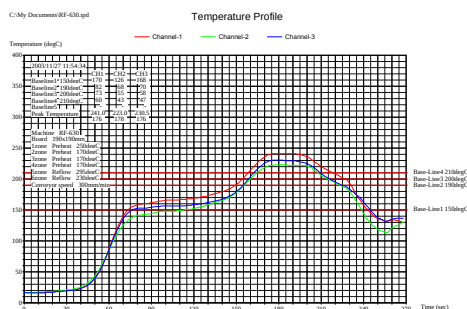

Printed Data

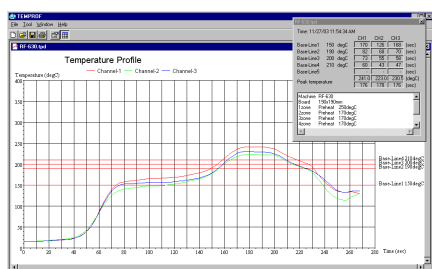

Display



CTP-300U Set



CTP-600U Set

Features

- CTP-300U/CTP-600U is low-priced temperature profile checker.
- A measurement range is 0 - 300°C.
- CTP-300U/CTP-600U can easily measure a temperature profile of Lead-free soldering and High-temperature soldering.
- A profile of measurement temperature is seen with a screen of a PC at realtime.

Specifications

- | | |
|---|-----------------------------|
| • Measurement method | Sensor cable method |
| • Measurement range | 0 - 300°C |
| • Accuracy | ±2°C |
| • Resolution | 0.5°C |
| • Measurement channel | CTP-300U:3ch / CTP-600U:6ch |
| • Measurement time | Max 12 min |
| • Sampling time | 1 sec |
| • Sensor | CA(K) 0.2mmØ 3m |
| • Data Output | RS-232C / USB |
| • Power supply | AC100V - 240V 3VA |
| • Application software | CD Japanese/English/Korean |
| • Computer configuration(PC is not included.) | |

Minimum PC configuration

- | | |
|------------------|--|
| CPU | Higher Celeron 500MHz. |
| RAM | 64MB or more. |
| HDD | 350MB available storage for software and Data. |
| CD drive | 1 |
| COM port | RS-232C or USB |
| Display | SVGA 800×600 resolution |
| Operating System | Windows 98SE/Me/2000/XP/Vista/7/8 |

Set Includes

- 1 Measurement Unit
- 1 Power supply unit(with German-Plug adapter)
- 3/6 Sensor(K)
- 1 CD-ROM(Application software)
- 1 Data output cable RS-232C(9p D-Sub/1.8m)
- 1 USB converter cable(RS-232C - USB/1m)
- 1 Kapton tape(10m)

Main Body

(W)150×(D)170×(H)54mm, 500g, Plastic Case

Packing

Carton, 350×250×150mm 1.5kg (Net 0.9kg)

* Do not enter a main body device in a furnace.

* Specifications subject to change without notice.